


THE ONE CONSTANT IS CHANGE

Flexitallic[®]

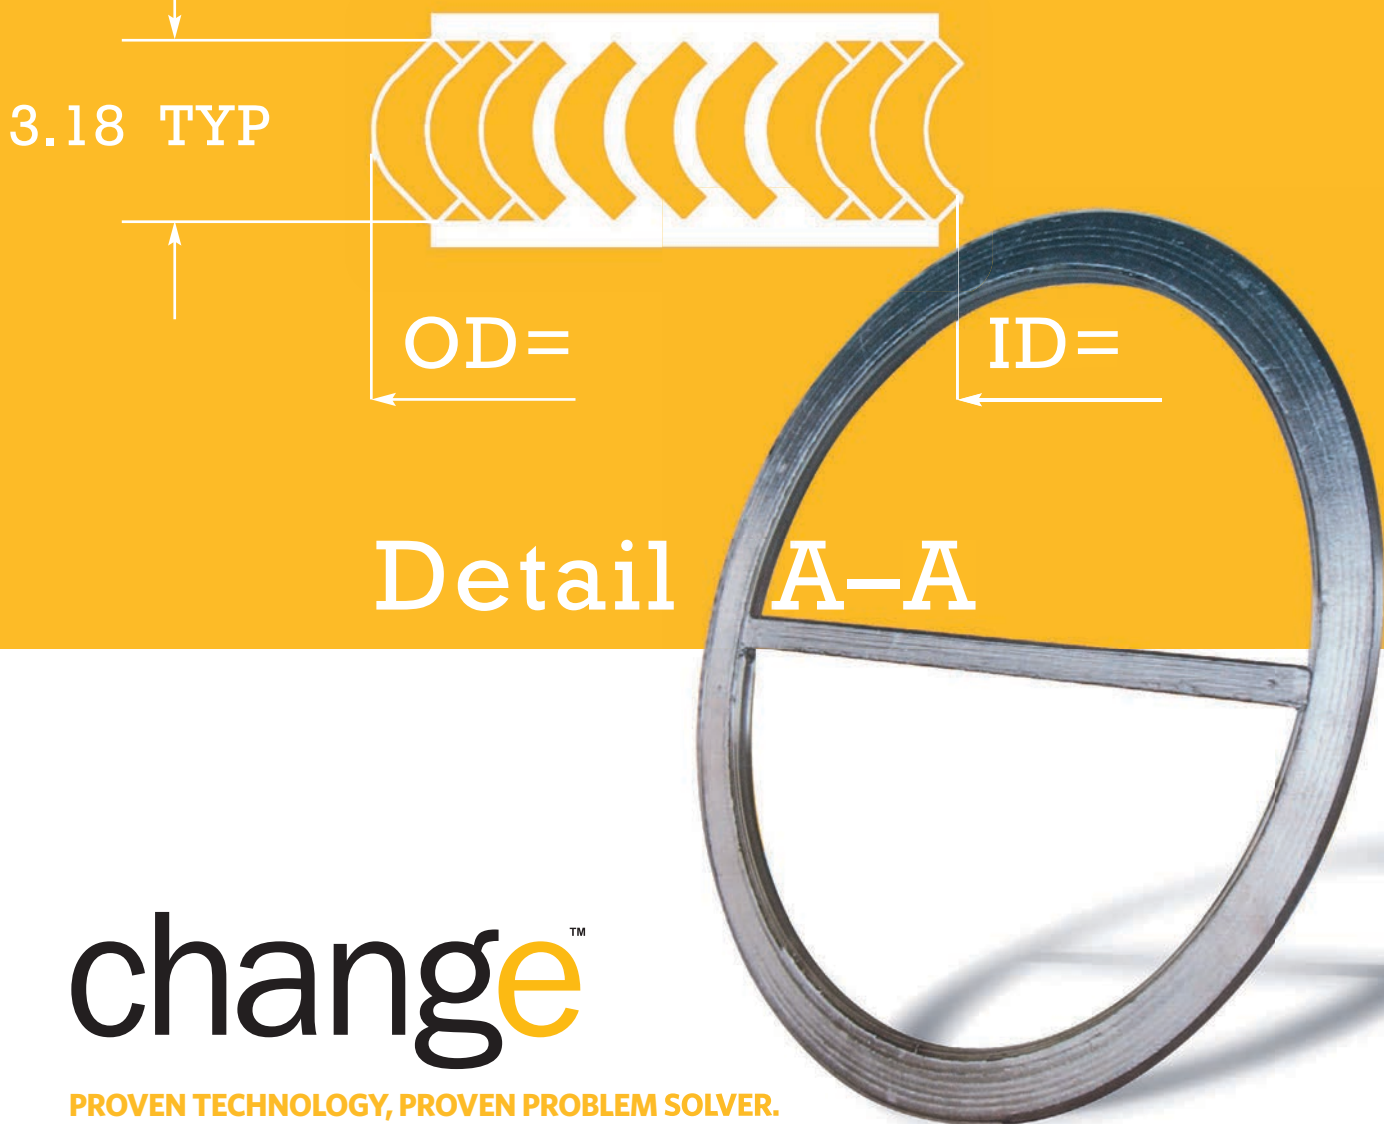

change[™]

PROVEN TECHNOLOGY, PROVEN PROBLEM SOLVER.

CHANGE HISTORY

**IT'S MADE LIKE NO OTHER,
SEALS LIKE NO OTHER,
AND PERFORMS 60% LONGER!**

CHANGE, IT'S SAFE.




THE CHANGE GASKET. UNIQUELY MANUFACTURED.



SHAPE

- > + 5X Thickness Change
- > 304 - 316L & Others
- > Develops a Uniquely Solid Gasket



LASER WELDED

- > Higher unit adhesion
- > Pin point accuracy
- > Solid unit construction

ENGINEERED LIKE NOTHING ELSE. TO PERFORM LIKE NOTHING ELSE.

When we invented the spiral wound gasket in 1912 there was nothing like it. 100 years later, we introduced the Change gasket, an incredibly resilient metal-wound heat exchanger gasket that's designed to deliver a seal with the most dynamic recovery. Today there are thousands of Change gaskets in service. Change is manufactured with proprietary equipment, using a 5 x thicker metal spiral and a unique laser welding process that penetrates completely through the winding wire so it requires no outer ring. Best of all, it's proven to perform without fail at least 60% longer than any other heat exchanger gasket, CGI spiral wound, double jacketed, CMG, or kammprofile.

AND THAT'S A GAME CHANGER.

**THE Change GASKET IS
AVAILABLE WITH A
LOCATING RING IN ALL
SIZES - UPON REQUEST**



CHANGE GASKET BENEFITS

Features/Benefits	Spiral Wound Gasket	Flexpro (kammprofile)	CHANGE Gasket
Blowout Resistant	●	●	●
Excellent Tightness	●	●	●
Excellent Recovery	Yes, improved with HT Inc X750	●	●
Cyclic Conditions	Yes, HT Inc X-750 Recommended	●	●
Good Handleability	●	●	●
Low Seating Stress	Not in all sizes/Pressure Ratings	●	●
Use on Nubbin, when centred	●	●	●
Flexibility Sealing Pipe Flanges	●	Potential Issue	●
Potential to: Reduce Complexity by Eliminating Spring Washers	Only with HT Inc X750	●	●
Potential to: Reduce Man Hours Required for Re-Torque	Only with HT Inc X750	●	●
Potential to: Reduce Man Hours by Eliminating Hot Torquing	Only with HT Inc X750	●	●


COMPRESSION VS. RECOVERY AT 124MPa (18,000 psi) GASKET STRESS

Gasket Style	% compression	% recovery
Change	30	34
CGI X-750HT	24	34
CGI, 316SS	30	26
DJ	28	7
Kammprofile	25	6

change™

The high level of stored energy gives the Change gasket extremely high recovery. In a compression test against other gaskets, the Change gasket recovered almost five-times better than Kammprofile and DJ gaskets.

CROSS SECTIONAL CUTAWAY

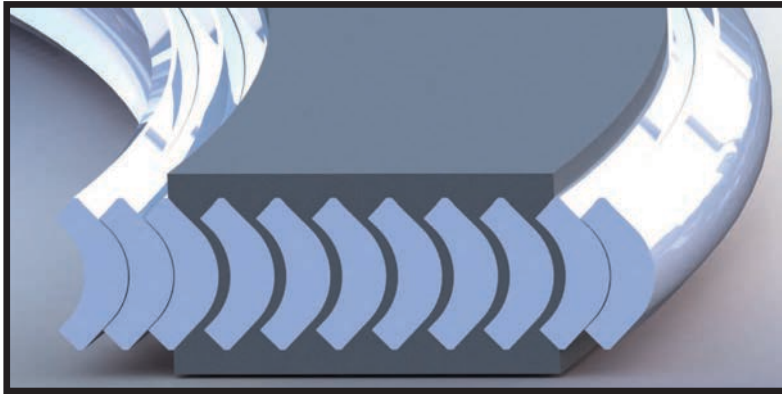

GASKET CONSTANTS

ASME m	2.5
ASME Y	6,400 psi (44.1 MPa)
PVRC Gb*	1,124 psi (7.75 MPa)
PVRC a*	0.25
PVRC Gs*	16.1 psi (0.11 MPa)

*Austenitic St.St. 300 series/FG

Wound like a spiral. Faced like a kammprofile.

Available Materials	Winding Materials	304, 316L, 347SS & Inconel 625 available in 3.20mm (0.125") and 4.50mm (0.177")
		Model and Inconel X750 are available in 3.20mm (0.125") only
	Filler & Facing Materials	Flexicarb SEL (other grades of flexible graphite available on request)
		PTFE, Thermiculite® (TH855) and Corriculite® also available
Locating	Carbon Steel outer guide ring - other metals available	
Dimensions	Minimum Diameter	25.4mm (1") ID
	Maximum Diameter	2540mm (100") ID - for larger diameters contact Applications Engineering
Thickness across wire	3.20 up to 600mm Dia (0.125" up to 24")	
	4.50 above 600mm Dia (0.177" above 24")	
Maximum Recommended Radial Width	25.4mm (1") for larger widths contact Applications Engineering	
Minimum Radial Width	9.5mm (3/8") for narrower widths contact Applications Engineering	
Shapes	Round up to 2540mm (100") or small oval up to 600mm (24")	




THERMAL TEST CYCLE - 24 CYCLES

USA Refinery specified rig and test represents the potential typical number of temperature fluctuations on a refinery over 4 years with no re-torque.

- 4" Class 300, ANSI B16.5 WNRF, ASTM A B16 Studs
- Thermal Cycle Phase
 - Purge and Heat up to 302°C (608°F) at 3.5°F/ min (temp chosen so oxidation would not skew results)
 - Pressurize to 480 psi (33 bar)
 - Hold 1 hr and measure pressure decay
 - Unassisted Cooling to Ambient
 - Re-heat up to 302°C
 - Repeat 24 times unless gross failure occurs
 - Approximately 24 hours per cycle
- Max allowable P drop: 14.5 psi (1 bar) over the full test

PRESSURE VS. CYCLE NUMBER

Across a 24-day, 24-cycle pressure vs thermal cycle test at 302°C (608°F) replicating industry application conditions, the Change gasket lost a total of 1.5 psi (0.1 bar), comfortably meeting the test pass rate, and outperforming every other gasket material. See graph below.

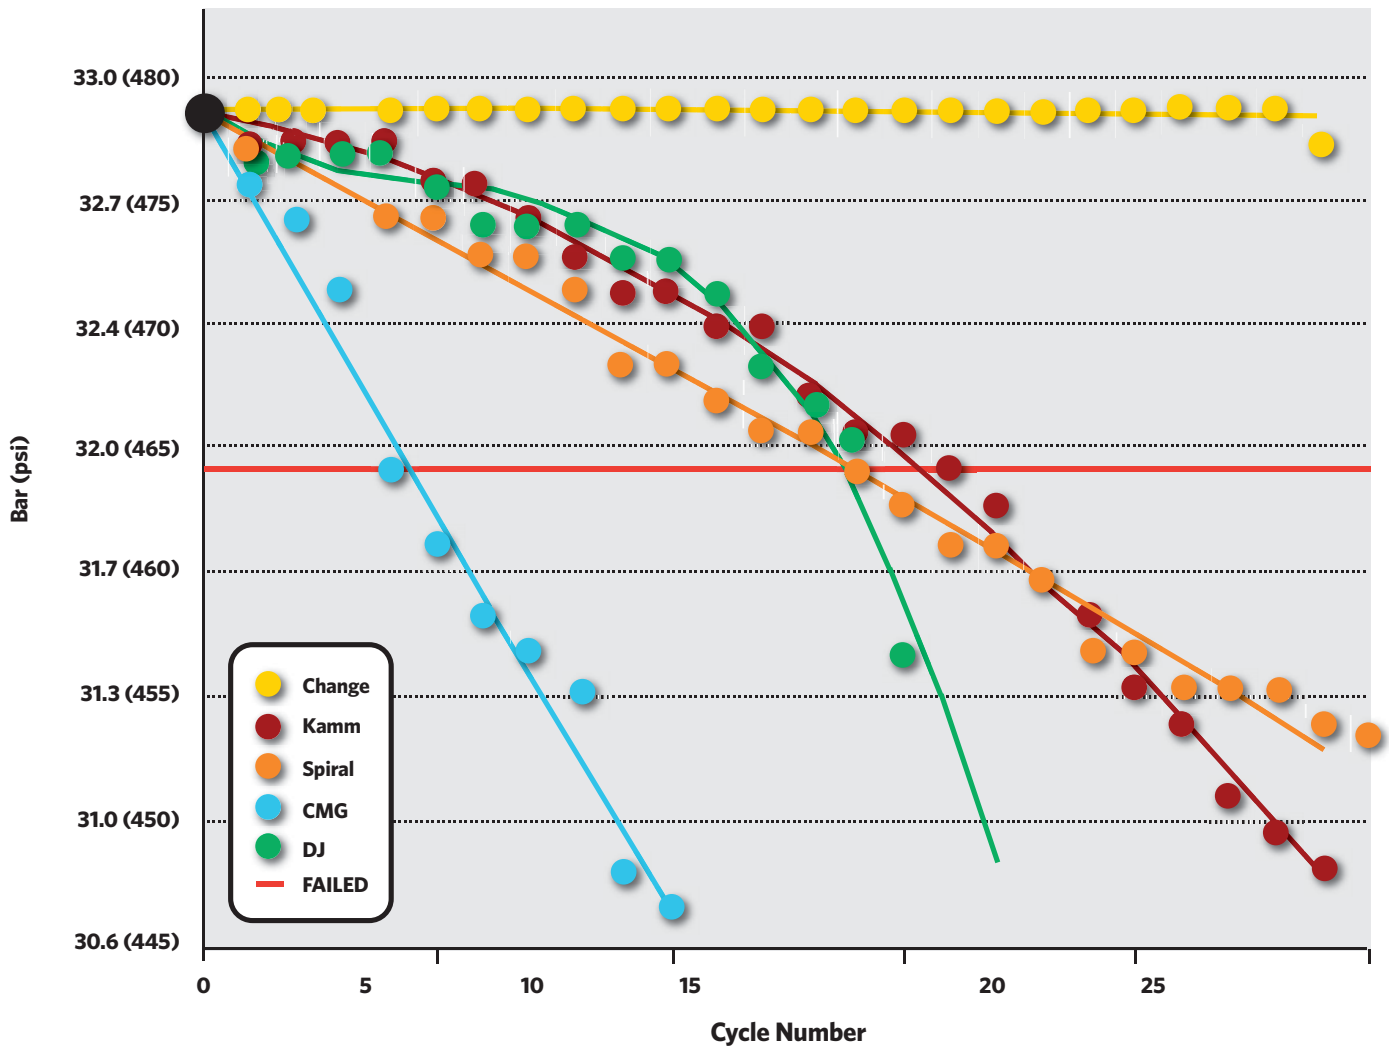

SUCCESSFUL APPLICATION, FERTILIZER INDUSTRY

- Superheat Exchanger
- Change gaskets installed October 2013 and "have withstood" 15 thermal cycles from ambient to 462°C (865°F) during the first 9 months of service
- Per Operations, they are "still performing well and remain in service"
- No re-torquing or hot torquing has been required
- NOx Gas & Steam
- Continuous Operating Conditions: 462°C (865°F), 1.04 MPa (150 psi)
- 36" (914.4mm) OD, 304 SS wire, Thermiculite
- Replaced Double Jacketed style that failed after 3 cycles

SUCCESSFUL APPLICATION, REFINING

- Application cycles from ambient to 379°C (715°F)
- Typically experience 28 thermal cycles between major outages requiring several gasket replacements
- Change in service since April 2013 with no issues to date and has already out-performed all previously attempted gaskets
- 63" (1600mm) diameter Change gasket, 3.52 MPa (510 psi)

SUCCESSFUL APPLICATION, CHEM PROCESSING

- Molten Sodium
- Operating Conditions: 0.104 MPa (15 psi), 182°C (360°F) with short term cycling to 815°C (1500°F)
- Flexible graphite tanged sheet caused a fire
- Change gasket safely and effectively sealing several WNRF to Lap Joint NPS flanged connections since November 2013

SUCCESSFUL APPLICATION, BOILER MANWAYS

- This Steel Mill converted all Boiler Manways to Change gaskets in March 2012
- The inherent resiliency of a Change gasket reacts ideally to changing loads when a boiler ramps up or down, expected or not
- Improved handling on larger diameter gaskets
- Replacing graphite spirals & tanged sheet

SUCCESSFUL APPLICATION, STEAM PIPING SYSTEM

- Change gasket sealing all steam piping and headers since February 2013 in this Pulp & Paper Mill 427°C (800°F), 0.62 MPa - 1.48 MPa (90psi - 215psi)
- Replaced standard spiral wound gaskets

SUCCESSFUL APPLICATION, SEALING OVER NUBBIN


- Double Jacketed (DJ) gasket continuously leaked in this exchanger sealing Steam at 343°C (650°F), 2.24 MPa (325 psi)
- Change gasket dimensioned to centre and seal over existing nubbin
- Per the refinery's Sr. Maintenance Engineer, it has been "working without leaks" since July 2013

Flexitallic®



CHANGE SUMMARY

- Construction is more robust than a spiral and kammprofile
- Compression is more consistent than a spiral and kammprofile
- Creep is VERY low
- Recovery is VERY high
- Seals extremely well, especially thermal cycles
- Crush resistant; no inner ring/compression stop required
- Fits most - if not all - flange arrangements
- Available in most industrial metals
- Fire safe to API 6FB
- TA LUFT approved (in accordance with VDI Guideline 2440)

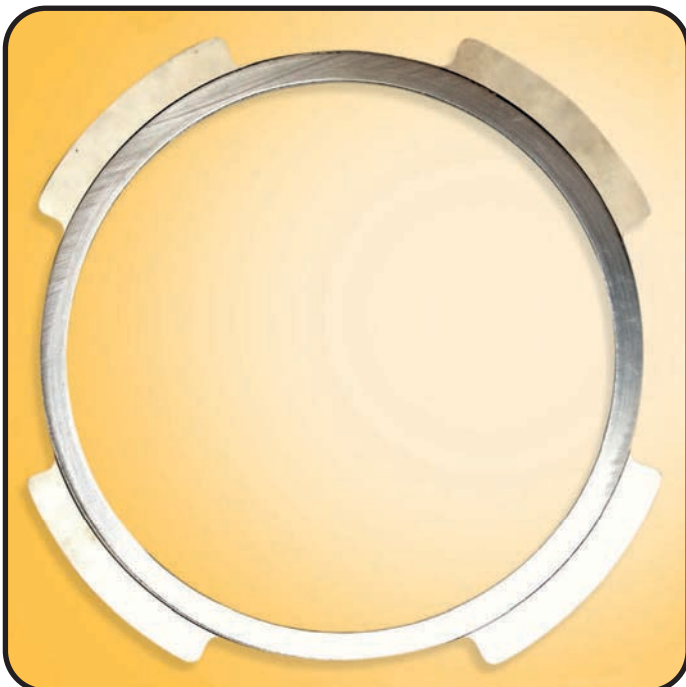

**A GASKET THAT'S
BETTER THAN ANY GASKET ON THE MARKET.
EVEN OURS!**

change™

Give us with your toughest application.



Flexitallic®

AUSTRALIA | FLEXITALLIC AUSTRALIA PTY LTD.

WA Branch

13-15 Vinnicombe Drive
Canning Vale
Perth, WA 6155
AUSTRALIA
Tel. +61 (0)8 9455 2155
Email. mailbox@flexitallic.au

VIC Branch

16/21 Barry Street
Bayswater
Melbourne, VIC 3153
AUSTRALIA
Tel. +61 (0)3 9729 9394
Email. mailbox@flexitallic.au
www.flexitallic.au

**TO REQUEST WHITE PAPER GO TO
www.flexitallic.com**

change™

UNITED KINGDOM

Flexitallic UK Ltd

Scandinavia Mill
Hunsworth Lane
Cleckheaton
West Yorkshire, BD19 4LN
UK
Tel. +44 1274 851273
flexitallic.com

*Branches also in Aberdeen,
Middlesbrough, Ellesmere Port
and South West*

ITALY

Flexitallic Italy Sr.l

Via Leonardo Da Vinci 6B
26020 Ticengo CR
ITALY
Tel. +39 0374 71006
Fax. +39 0374 71277
www.flexitallic.com

THAILAND

**Flexitallic Sealing
Technology Co. Ltd.**

No. 7/456, Moo 6,
Amata City Rayong Industrial Estate
Mabyangporn Sub-district
Pluak Daeng District,
Rayong Province
THAILAND
Tel. +66 (0)33017561 - 3
Fax. +66 (0)33017564
www.flexitallic.com

FRANCE

Siem Supranite

a Flexitallic Company

31-33 Rue de Mogador
75009 Paris
FRANCE
Tel. +33 (0)1 48 88 88 88
Fax. +33 (0)1 47 66 88 44
www.siem.fr

UNITED ARAB EMIRATES

Flexitallic LLC

PO Box No. 6591-AI Jazeera
Plot 108, Road E
Al Hamra Industrial Area
Ras Al Khaimah
UNITED ARAB EMIRATES
Tel. +971 7 202 5300
www.flexitallic.com

Branch also in Abu Dhabi.

UNITED STATES

Flexitallic US LLC

6915 Highway 225
Deer Park
Texas 77536
USA
Tel. +1 281 604 2400
Fax. +1 281 604 2415
www.flexitallic.com

GERMANY

Flexitallic GmbH

Halskestr. 13
47877 Willich
GERMANY
Tel. +49 (0) 2154 95363-0
Fax. +49 (0) 2154 95363-29
www.flexitallic.com

CHINA

**Flexitallic Gasket Technology
(Suzhou) Co. Ltd.**

Building A, 1868 Guangming Rd
Technological Development Zone
Wujiang Economic 215200
CHINA
Tel. +86 512 6303 2839
Fax. +86 512 6303 2879
www.flexitallic.com

CANADA

Flexitallic Canada Ltd.

4340 - 78 Avenue
Edmonton
Alberta, T6B 3J5
CANADA
Tel. +780 466 5050
Fax. +780 465 1177
www.flexitallic.com

BENELUX

Flexitallic Benelux BVBA

Smallandlaan 21
2660 Hoboken
BELGIUM
Tel. + 32 3 369 19 68
www.flexitallic.com

SINGAPORE

Flexitallic Ltd.

Singapore Branch

Level 42 Suntec Tower Three
8 Temasek Boulevard
SINGAPORE
038988
Tel. +65 68663638
www.flexitallic.com

MEXICO

Flexitallic Mexico/Equiter SA de CV

Calle 28 #2571
Zona Industrial Bienestar Social
Guadalajara, Jalisco
MEXICO. CP 44940
Tel. +52 33 3145 3454/1763
www.flexitallic.com