

SIGMA®

Chemically resistant.
Uniformly strong.
Inherently clean.
Total integrity for the most
demanding applications.



FLEXITALLIC

THE FLEXITALLIC GROUP IS THE INTERNATIONAL MARKET LEADER IN THE MANUFACTURE AND SUPPLY OF HIGH QUALITY, HIGH VALUE INDUSTRIAL STATIC SEALING PRODUCTS.

ABOUT US

As the developer of the spiral wound gasket in 1912, we have built on this legacy of innovation with revolutionary products including Thermiculite®, Sigma®, Change™ Gasket and more recently Corriculite®, our tightest sealing material, which is set to transform the global sealing industry.

We have a global network of Allied Distributors across 30 countries. This ensures local demand is met quickly, providing a combination of the highest product quality and outstanding customer service.

Our extensive and varied product offering includes spiral wound gaskets, RTJ gaskets, Flexpro™ Kammprofiles, sheet materials, dynamic and static packings, pipe support and custom rubber products. Drawing upon the group's rich history and present day values of leadership, quality, service and technology, we are at the forefront of developing sealing solutions for industries around the world.

In addition to a wide range of products, we also deliver world-class technical support and Joint Integrity training.

OUR MISSION

MAKING THE WORLD SAFER AND CLEANER THROUGH ENGINEERED SEALING SOLUTIONS.





Flexitallic Global Locations

BASED ON SALES AND GEOGRAPHIC REACH, THE FLEXITALLIC GROUP HAS BECOME *THE* GLOBAL SUPPLIER OF INDUSTRIAL GASKETS.

INNOVATIVE PRODUCT RANGE

We have a rich history of innovation, which has seen us lead the industry with many new products.

Over the years, our products have gained a reputation for quality, reliability and technology that is second to none.

CUSTOMISED ENGINEERING SOLUTIONS

Our Application Engineering, Production Engineering and R&D teams work closely together to design, develop and manufacture bespoke sealing solutions. We have been responsible for a number of truly revolutionary products, including Thermiculite®, Sigma® and Corriculite®, which ensures we are able to continually meet the ever more stringent requirements of our customers.

FLEXITALLIC® SAFE

Over the last century, our aggressive R&D efforts have helped customers become Flexitallic® Safe. From the first Spiral Wound Gasket in 1912 to the ever evolving applications for Thermiculite®, our goal is to develop materials that push the parameters of heat, pressure and chemical resistance.

OUR COMMITMENT TO QUALITY

We place great emphasis on maintaining international quality standards, and are approved to ISO 9001: 2015, ISO 14001:2015, ISO 45001: 2018, API 6A and API 17D, to ensure we meet the highest possible standards for all our products and services. We also invest heavily in test and quality assurance equipment to maintain our reputation for the highest quality products.

Our materials are subjected to a wide range of tests as specified by statutory regulations and customer requirements. These approvals enable our customers to make informed choices as to the suitability of a product for each and every application.

INSIDE INDUSTRY

We pride ourselves on not simply supplying products, but by supporting customers with a detailed knowledge of their industry and applications, so that products and services are tailored to their specific needs. This unique approach means that we focus on providing more than just a product, but also a complete solution that adds genuine value to our clients.

GLOBAL DISTRIBUTION... LOCAL SUPPORT

Our products are distributed through a global network of Allied Distributors. These carefully selected distribution partners are strategically located within their territory to deliver the best possible service and products to our customers. This approach means our products and know-how are available to the global industries we service.

Allied Distributor



Licensee Manufacturer



SIGMA[®]

FOR APPLICATIONS WHERE CHEMICAL RESISTANCE IS PARAMOUNT, SIGMA[®] IS THE ONLY OPTION.

INNOVATIVE MATERIALS, ENGINEERED SOLUTIONS

Utilising a unique manufacturing process exclusive to Flexitallic, SIGMA[®] represents the latest generation of biaxially orientated PTFE materials.

Specified by more than 500 major companies, SIGMA[®] stands side by side with Flexitallic metal gaskets and Thermiculite[®] gasket materials to provide you with the complete and innovative sealing solutions you demand to handle all your sealing applications.

By designing seals that last longer in the most difficult applications, SIGMA[®] helps production processes increase their output capabilities.

TOTAL INTEGRITY

When it comes to applications involving aggressive chemicals, SIGMA[®] provides enhanced levels of sealing performance when compared to conventional materials.

While conventional PTFE-based sealing materials have long been the choice for superb chemical resistance, they are not ideally suited to achieve the maximum reduction of creep in situations where seal integrity is paramount - a vital consideration for stringent long-term emission control.

Utilising a unique manufacturing process exclusive to Flexitallic, we created SIGMA[®], an innovatively-engineered line of biaxially-orientated PTFE gasket materials.


Developed for processes ranging from cryogenic temperatures to 500°F (260°C), and suitable for sealing virtually every chemical medium across the entire pH range (0-14), SIGMA[®] pairs the outstanding chemical resistance of PTFE with enhanced dimensional stability to improve overall material stress retention.

The non-stick properties of the SIGMA[®] range of materials offer excellent removal after usage to dramatically reduce the downtime on shutdown.

In addition, all components in the SIGMA[®] range are FDA compliant. This inherently clean nature makes them ideal for use in industries where product contamination is of concern such as food, pharmaceuticals and electronics.

Material Compliance and Approvals:

BAM, DVGW, EN1935 10/2011, FDA, TA LUFT, USP Class 6, WRAS

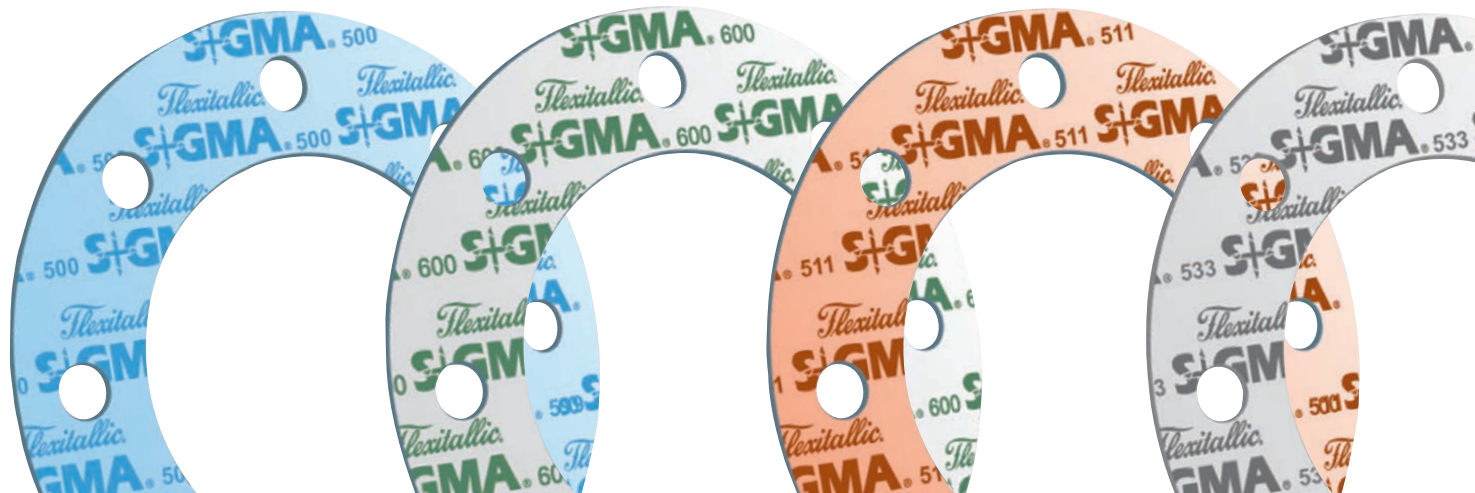

SIGMA[®]

FOR TOTAL SEALING RELIABILITY, INVENTORY CONSOLIDATION AND STRICT LONG-TERM EMISSION CONTROL, NOTHING OUT-PERFORMS SIGMA[®] - THE INNOVATION OF INTEGRITY.


INNOVATIVE MATERIALS, ENGINEERED SOLUTIONS.

PRESSURE CONTAINMENT AND TEMPERATURE			
Thickness	up to 1/16" (1.5mm)	0.08" (2.0mm)	1/8" (3.0mm)
Max. Temperature	500°F (260°C)	500°F (260°C)	500°F (260°C)
Max. Pressure psig (bar)	1235 (85)	1160 (80)	1088 (75)

Note: The pressure/temperature (shown above) cannot be used simultaneously.

pH Range		0-14
Sheet Sizes*	Metric	1.5m x 1.5m
	US Standard	60" x 60"
Sheet Thicknesses*	Metric	0.75mm - 3.0m
	US Standard	1/32" - 1/8"
Recommended Surface Finish	Metric	3.2 - 6.3 μm
	US Standard	125 - 250 μin

Note: Other sheet sizes and thicknesses are available on request.

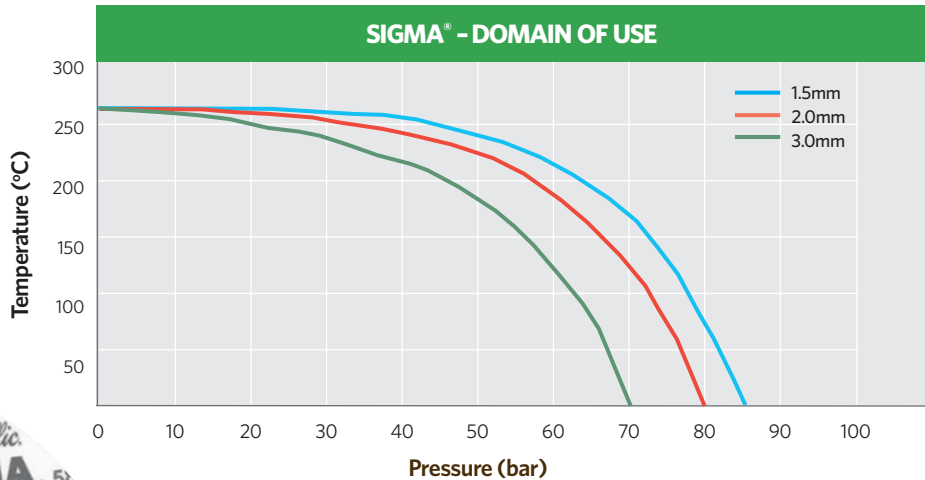

SIGMA[®] PRODUCT RANGE

UNPARALLEL SEALING PERFORMANCE

SIGMA[®] - THE INNOVATION OF INTEGRITY.

SIGMA[®] 500



- Enhanced compressibility for low bolt loads
- Improved flexibility over conventional calendered and graphite sheets
- Suitable for use in alkali, acid and chlorine service
- Can be used for all concentrations of sulphuric acid
- WRAS approved for hot and cold potable water services.

SIGMA[®] 511



- Standard compressibility
- Strong acids (except hydrofluoric) to general chemicals
- Can be used for all concentrations of sulphuric acid
- WRAS approved for hot and cold potable water services
- Suitable for oxygen & peroxide service.

SIGMA[®] 533



- Standard compressibility
- Ideal for sealing food, pharmaceutical and non-contamination applications
- Strong alkalis and other general chemicals
- Aqueous hydrofluoric acid below 49%
- Not suited for sealing molten alkali metals or fluorine gas.

SIGMA[®] 588



- Unique cellular structure - low load sealing for damaged contact surfaces
- Layered structure enhances dimensional stability and assists installation of larger gaskets
- Layers bonded by direct sintering - no adhesive layer or potential leak paths
- Suitable for use in both concentrated acid and alkali service
- Ease of use - Eliminate jacket 'fold over' associated with large envelope gaskets.

SIGMA[®] 600



- High compressibility for ultra-low bolt loads; plastic and glass lined equipment
- Suitable for use across a wide range of chemical media; acids, alkalis, halogens and hydrocarbons
- Universal - minimises inventory requirements and eliminates 'mis-application'
- Easy to cut, handle, install and remove
- Pigment and filler free - suitable for 'contamination sensitive' applications.



SIGMA[®] PRODUCT RANGE

TYPICAL PHYSICAL AND MECHANICAL PROPERTIES

	Unit	Standard	SIGMA [®] 500	SIGMA [®] 511	SIGMA [®] 533	SIGMA [®] 588	SIGMA [®] 600
Colour		na	Blue	Pink	Off-white	White	White
Density	g/cm ³ (lb/ft ³)	ASTM F1315	1.4 (87)	2.2 (137)	2.9 (180)	1.1 (68)	0.8 (50)
Filler System	na	na	Glass Microspheres	Silica	Barytes	na	na
Tensile Strength	MPa (psi)	ASTM F152	14 (2030)	15 (2175)	15 (2175)	10 (1450)	8 (1160)
Compressibility	%	ASTM F36	35	7	8	55	68
Recovery	%	ASTM F36	44	44	43	24	5
Residual Stress (175°C)	MPa	DIN 52913	30	30	28	28	34
Creep Relaxation	%	ASTM F38	31	35	33	< 50	< 50
Gas Leakage	mL/min	DIN 3754	0.0	0.0	0.0	0.0	0.0
Liquid Leakage (50psi internal pressure)	mL/hr	ATSM F37	0.7	1.8	1.8	1.5	1.2

GASKET CONSTANTS & DESIGN INFORMATION - ASME / PVRC (Data based on 1/16" (1.5mm) thickness material)

	Unit	Standard	SIGMA [®] 500	SIGMA [®] 511	SIGMA [®] 533	SIGMA [®] 588	SIGMA [®] 600
m Factor	na	ASME	1.4	1.4	1.4	1.4	1.4
Y Value	MPa (psi)	ASME	13 (1885)	16 (2320)	16 (2320)	11 (1595)	11 (1595)
G _b	psi	PVRC ROTT	4	209	115	317	405
a	na	PVRC ROTT	0.80	0.36	0.38	0.29	0.27
G _s	psi	PVRC ROTT	11.5 x 10 ⁻²	4.9 x 10 ⁻³	6.5 x 10 ⁻⁵	1.1 x 10 ⁻⁶	24 x 10 ⁻²
T _{pmax} [†]	na	PVRC ROTT	13150	24750	26800	50250	31850
Q _{smax} (RT)	MPa	EN13555	> 220	> 220	> 220	> 220	tba [*]
Q _{smax} (175°C)	MPa	EN13555	> 220	> 220	> 220	> 220	tba [*]
Q _{smax} (225°C)	MPa	EN13555	> 180	> 220	> 220	> 220	tba [*]
PQ _r (60 MPa/175°C)**	na	EN13555	0.72	0.74	0.60	0.51	tba [*]
Q _{min} /0.01***	MPa	EN13555	16	34	31	16	15
Q _{min} /0.01****	MPa	EN13555	< 10	15.0	< 10	< 10	< 10

[†]Draft 9 Test Procedure. ^{*}For further information please call the Flexitallic Applications Engineering Dept.

Stiffness: 500kN/mm. *Leak rate: mg/m². ****QA: 40 MPa. Additional EN13555 data is available on request.



UNITED KINGDOM **Flexitallic UK Ltd.**

Scandinavia Mill
Hunsworth Lane
Cleckheaton
West Yorkshire, BD19 4LN
UK
Tel. +44 1274 851273
www.flexitallic.com

*Branches also in Aberdeen,
Middlesbrough, Ellesmere Port
and South West.*

ITALY **Flexitallic Italy Sr.l**

Via Leonardo Da Vinci 6B
26020 Ticengo CR
ITALY
Tel. +39 0374 71006
Fax. +39 0374 71277
www.flexitallic.com

THAILAND **Flexitallic Sealing Technology Co Ltd.**

No. 7/456, Moo 6,
Amata City Rayong Industrial Estate
Mabyangporn Sub-district
Pluak Daeng District
Rayong Province
THAILAND
Tel. +66 (0)33017561 - 3
Fax. +66 (0)33017564
www.flexitallic.com

About The Flexitallic Group

The Flexitallic Group is a global leader in specialised sealing solutions and products serving the oil and gas, power generation, chemical and petrochemical industries in emerging and developed markets. Focused on the upstream, downstream and power generation sectors, it has operations in France, the United States, Canada, Mexico, the United Kingdom, Germany, Italy, Belgium, the United Arab Emirates, Thailand, Australia and China plus a network of worldwide licensing partners and distributors.

FRANCE **Siem Supranite** *a Flexitallic Company*

31-33 Rue de Mogador
75009 Paris
FRANCE
Tel. +33 (0)1 48 88 88 88
Fax. +33 (0)1 47 66 88 44
www.siem.fr

UNITED ARAB EMIRATES **Flexitallic LLC**

PO Box No. 6591-AI Jazeera
Plot 108, Road E
Al Hamra Industrial Area
Ras Al Khaimah
UNITED ARAB EMIRATES
Tel. +971 7 202 5300
www.flexitallic.com

Branch also in Abu Dhabi.

AUSTRALIA **Flexitallic Australia Pty Ltd.**

WA Branch
13-15 Vinnicombe Drive
Canning Vale
Perth, WA 6112
AUSTRALIA
Tel. +61 (0)8 9455 2155
Email. mailbox@flexitallic.au

VIC Branch
16/21 Barry Street
Bayswater
Melbourne, VIC 3153
AUSTRALIA
Tel. +61 (0)3 9738 1249
Email. mailbox@flexitallic.au
www.flexitallic.au

GERMANY **Flexitallic GmbH**

Halskestr. 4a
47877 Willich
GERMANY
Tel. +49 (0) 2154 95363-0
Fax. +49 (0) 2154 95363-29
www.flexitallic.com

CHINA **Flexitallic Gasket Technology (Suzhou) Co., Ltd**

Building A, 1868 Guangming Rd
Technological Development Zone
Wujiang Economic 215200
CHINA
Tel. +86 512 6303 2839
Fax. +86 512 6303 2879
www.flexitallic.com

UNITED STATES **Flexitallic US LLC**

6915 Highway 225
Deer Park
Texas 77536
USA
Tel. +1 281 604 2400
Fax. +1 281 604 2415
www.flexitallic.com

BENELUX **Flexitallic Benelux BVBA**

Smallandlaan 21
2660 Hoboken
BELGIUM
Tel. + 32 3 369 19 68
www.flexitallic.com

SINGAPORE **Flexitallic Ltd.** *Singapore Branch*

Level 42 Suntec Tower Three
8 Temasek Boulevard
SINGAPORE
038988
Tel. +65 68663638
www.flexitallic.com

CANADA **Flexitallic Canada Ltd.**

4340 - 78 Avenue
Edmonton
Alberta, T6B 3J5
CANADA
Tel. +780 466 5050
Fax. +780 465 1177
www.flexitallic.com